



Mini HDMI Dongle Adapters

- Converts an HDMI Digital A/V signal to standard HDMI and DVI
- Maximum resolution of 1080p
- Plug & play, powered by the HDMI source device


Electrical Characteristics:

Max Resolution Supported:	1920x1200, 1080p
Voltage:	5V, 500mA (VGA models)
Voltage Rating:	30V
Pixel clock rate:	Up to 165MHz
Impedance :	100±5
Intra-pair skew:	15ps/m max

Physical Characteristics:

Minimum Bend Radius:	12mm
Operating Temperature:	0°C to 70°C
Storage Temperature:	-10° to 40° C
Adapter Length:	203mm
Approvals:	CE

Conductor (Qty. 3):		Overall Cable	
Conductor Type:	32AWG 7/0.08TCS x15 Tinned Copper	Jacket:	PVC, Black
Insulation:	Foam-PE, $\phi 0.63 \pm 0.05$	OD:	5.5 \pm 0.2
Shield:	AL Wrap; Braid, 16/6/0.12AMA 75% Coverage		
Drain:	32AWG 7/0.127B		

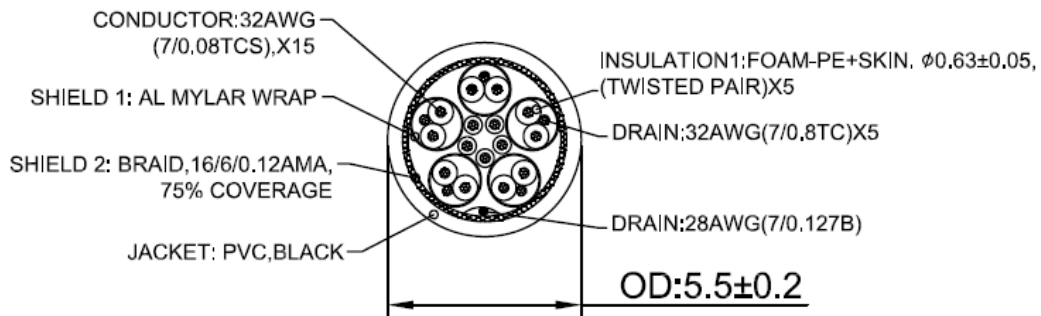

Specifications: Mini HDMI Dongle Adapters

A Group brand | 

Part Number	Description	Weight (Kg)
80505	Mini HDMI Male to DVI Female Dongle	
80506	Mini HDMI Male to HDMI Female Dongle	



GET CONNECTED

Cables To Go
Road 30 Hortonwood Industrial Estate
Telford, Shropshire TF1 7AB UK
UK Phone (0)800 328 2916
EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

