

SFP-6541 Version: 1

## 10Gbps Single-mode BIDI SFP+ Transceiver, 40km, TX 1330nm / RX 1270nm

The LevelOne SFP-6541 is a high performance, cost-effective SFP transceiver. It provides up to 10 Gbps bi-directional data transfer rate at distances up to 40km on a single fiber core. These bi-directional SFP Transceivers allow data transfer in either direction through a single optical fiber by employing separate wavelengths travelling in either direction.

The SFP-6541 transmits using a wavelength of 1330nm and receives using a wavelength of 1270nm. When coupled with the LevelOne SFP-6441 transceiver which transmits at and receives at the opposite rates (1270nm TX and 1330nm RX) you get bi-direction data communication on a single fiber core. The LevelOne SFP-6541 is therefore an optimal solution for a high number of fiber lengths on just a few fibers.

### Key Features

- 10Gbps Bi-directional single fiber link
- Supports Digital Diagnostics Monitoring Interface (DDMI) for easy status monitoring
- Compliant with IEEE 802.3ae 10GBase-LR, 10GBase-LW standards
- Compatible with SFP Multi-Sourcing Agreement (MSA) standards
- Hot-swappable providing non-stop service
- RoHS compliant and Lead Free

### Specifications

#### System Specifications

##### Standards:

- IEEE 802.3ae 10GBase-LR
- IEEE 802.3ae 10GBase-LW

##### Protocols:

SFP Multi-Sourcing Agreement (MSA) SFF-8472 SFF-8431 SFF-8432

##### Port:

- Bi-directional
- 9/125  $\mu$ m Single-mode Fiber
- Duplex LC Receptacle

##### Wavelength (nm):

TX 1330nm/ RX 1270nm



**Optical Receive Sensitivity:**

-13dBm

**Optical Link Power Budget:**

TX Power: 1 to 6dBm

RX Power: -13 to 0.5dBm

**Power Input:**

3.47V / 300mA

**Power Consumption:**

<1.0W (0 to 70°C)

<1.5W (-40 to 85°C)

**Data Rate:**

Up to 10.3Gb/s data links

**Optical Transmission Power:**

6dBm

**Operating Temperature (°C):**

0 to 70°C

**Operating Humidity (Non-condensing):**

0 to 85%

**Storage Temperature (°C):**

-40 to 85°C

## Features

**General:**

Hot-swappable

**Management:**

DDMI (Digital Diagnostics Monitoring Interface)

## Performance

**Operating Distance:**

40km

## Physical Specifications

**Dimensions (W x D x H mm):**

13.7 x 56.5 x 11.8 mm

**Weight (g):**

20g

## Approval and Compliance

**EMI/EMS:**

CE




**Safety:**

- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2
- Immunity compatible with IEC 61000-4-3
- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2

**Environmental Test:**

RoHS

## Diagram

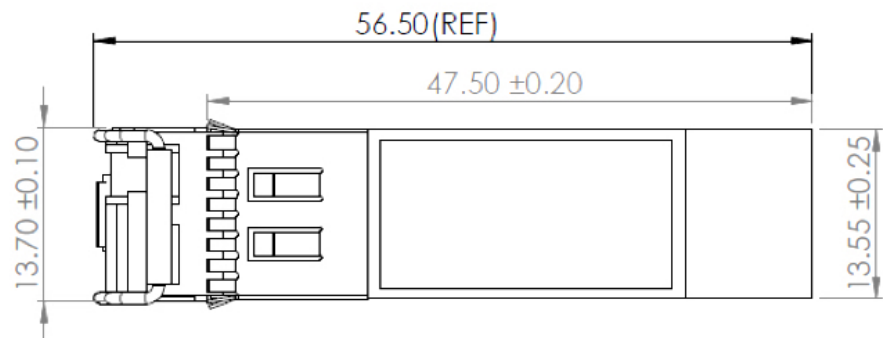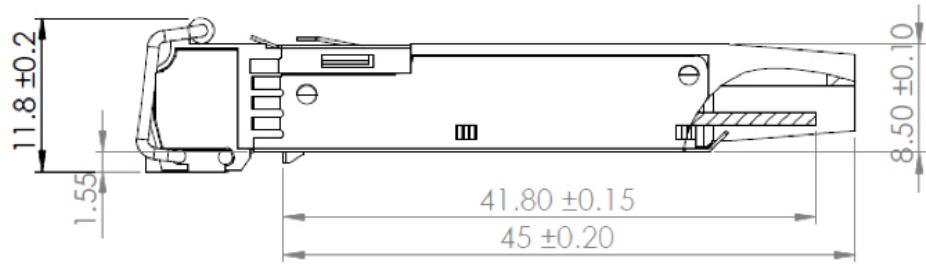

Unit : mm

---

## Order Information

SFP-6541

---

## Package Contents

SFP-6541

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.