



## HDMI 2.1 Ultra High Speed Cable

119380 / 119381 / 119382 / 119383

The equip<sup>®</sup> HDMI Cable not only brings superior audio and video experience but also provides bi-directional data streams. Connecting your HDMI equipments and HDMI-interfaced displays via this cable, you can enjoy the high quality online videos with ease.

### | Specification

|                     |                      |
|---------------------|----------------------|
| <b>Connectors</b>   | 2 x HDMI Type A Male |
| <b>Cable</b>        | 28AWG                |
| <b>Construction</b> |                      |
|                     | 119380: 1.0m         |
|                     | 119381: 2.0m         |
| <b>Cable length</b> | 119382: 3.0m         |
|                     | 119383: 5.0m         |

### | Ordering Information

| PN     | EAN           |
|--------|---------------|
| 119380 | 4015867221525 |
| 119381 | 4015867221532 |
| 119382 | 4015867223291 |
| 119383 | 4015867223307 |


### | Key Features

- HDMI version 2.1
- Supports HDMI Ethernet Channel (HEC)
- Bandwidth up to 48Gbps
- Supports video resolutions up to 8K/60Hz
- Resolution up to: 7680 x 4320@60Hz, 5120 x 2880@120Hz , 2560 x 1440@240Hz
- Dynamic HDR (HDR Dynamic Metadata)
- Enhanced Audio Return Channel (eARC) Quick
- Media Switching (QMS)
- Quick Frame Transport (QFT)
- Auto Low Latency Mode (ALLM)
- Display Stream Compression (DSC)

### | Package Contents

- 1 x HDMI Cable

Packing: Equip Zip-bag

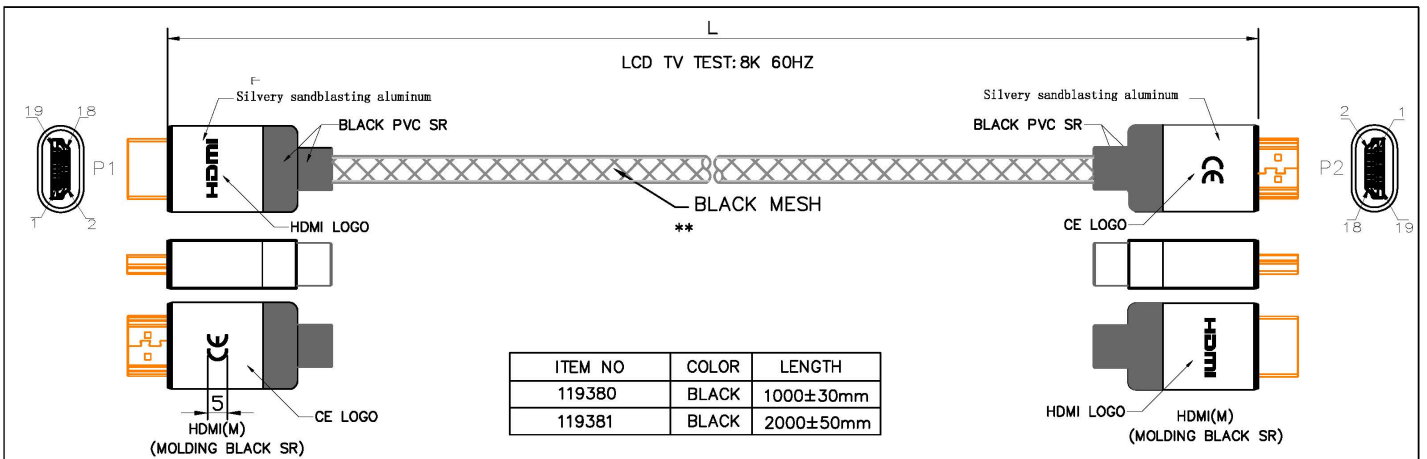

3. CONNECTORS: HDMI(M)\*2PCS(BLACK INSULATOR)(SHELL GOLD PLATED).

4. MOLD: MOLDING TYPE.

5. CONTACTS:

|         |      |   |   |      |   |   |      |   |   |      |    |    |      |    |    |    |    |    |    |       |
|---------|------|---|---|------|---|---|------|---|---|------|----|----|------|----|----|----|----|----|----|-------|
| HDMI(M) | 1    | 3 | 2 | 4    | 6 | 5 | 7    | 9 | 8 | 10   | 12 | 11 | 14   | 19 | 17 | 13 | 15 | 16 | 18 | 64    |
| HDMI(M) | PAIR |   | G | PAIR |   | G | PAIR |   | G | PAIR |    | G  | PAIR |    | G  | 4C |    |    |    | SHELL |


6. Test machine test condition.

A. 100% OPEN, SHORT & INTERMITTANCE TEST.

B. CONDUCTOR RESISTANCE: 2ohms MAX:

C. INSULATION RESISTANCE: 10MΩ Min / 10ms:

7. ALL MUST BE MEET ON ROHS COMPLIANT.



DDC ZIP BAG+LABEL

| COMPANY  | DDC        | ITEM NO.    | 119380      | NO          | B |
|----------|------------|-------------|-------------|-------------|---|
| REVISION | DATE       | DISCRIPTION | DRAWN BY    | Yuwenming   |   |
| REV.A/0  | 2019.09.15 |             | DESIGNED BY | Chenrunming |   |
|          |            |             | APPROVAL BY | Chenlianwei |   |