



DATA SHEET

4-Port USB-A 3.0 Hub - SuperSpeed USB 5Gbps

Add four SuperSpeed USB 3.0 ports to your computer and transfer data up to 5Gbps

OVERVIEW

The 4-Port USB-A 3.0 Hub expands the USB capabilities of a computer by providing four USB-A ports, so you can connect more peripherals and transfer data up to 5Gbps—ideal for supporting USB 3.0 cameras, keyboards, mice, flash storage drives, and other low-powered USB devices. Small, lightweight, and portable, the hub can easily fit on a desktop or be stored in a laptop case. This hub is a perfect accessory for the Microsoft® Surface® Book 2, Chromebooks, and other leading laptops and tablets.

With a transfer rate of up to 5Gbps, it is fully backward compatible with older USB 2.0 and 1.1 devices. No need to worry about software or drivers to install, the plug-and-play feature makes it simple to just connect and start using right away.

FEATURES

- Four SuperSpeed USB 3.0 ports to add peripherals and transfer data up to 5Gbps
- Compact design reduces desktop clutter and makes it easy to travel
- Backward compatible with previous USB specifications and devices
- Plug-and-Play, just connect and use right away
- Perfect for laptops, Chromebooks, and the Microsoft® Surface® Book 2

ITEM	DESCRIPTION
------	-------------

C2G54461	4-Port USB-A 3.0 Hub - SuperSpeed USB 5Gbps
----------	---

SIGNAL SPECIFICATIONS

- Supports USB 3.0 Input; Four USB 3.0 Outputs
- Max 900mA per port (only one port is connected), Max 900mA for four ports when four ports are connected
- Supports USB 3.0 SuperSpeed (5Gbps) transmission, downward compatible with USB 2.0
- USB 3.0 port supports to charge and transmit data for the USB device simultaneously

ELECTRICAL SPECIFICATIONS


- Rating: Temp 80°C; Voltage 30V
- Conductor Resistance: At 20°C Max 34AWG: 860 OHMS/KM
- Insulation Resistance: 10M-KM Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown (EIA-364-20)

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +45°C
- Operating Humidity: 10% to 85% RH (No Condensation)
- Storage Temperature: -10°C to +70°C
- Storage Humidity: 5% to 90% RH (No Condensation)

PHYSICAL CHARACTERISTICS

- USB-A Male: Insulation: Blue, Shell Nickel Plated
- USB-A Female: Insulation: Blue, Shell Nickel Plated
- USB-A Male Molding Material: Black PVC Conforms ROHS
- USB-A Female Molding Material: Black ABS Conforms ROHS
- Cable OD: 4.5mm
- Cable Bend Radius: 45mm
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2
- USB 2Product is CE Marked and Conforms to 2011/65/EU ROHS 2

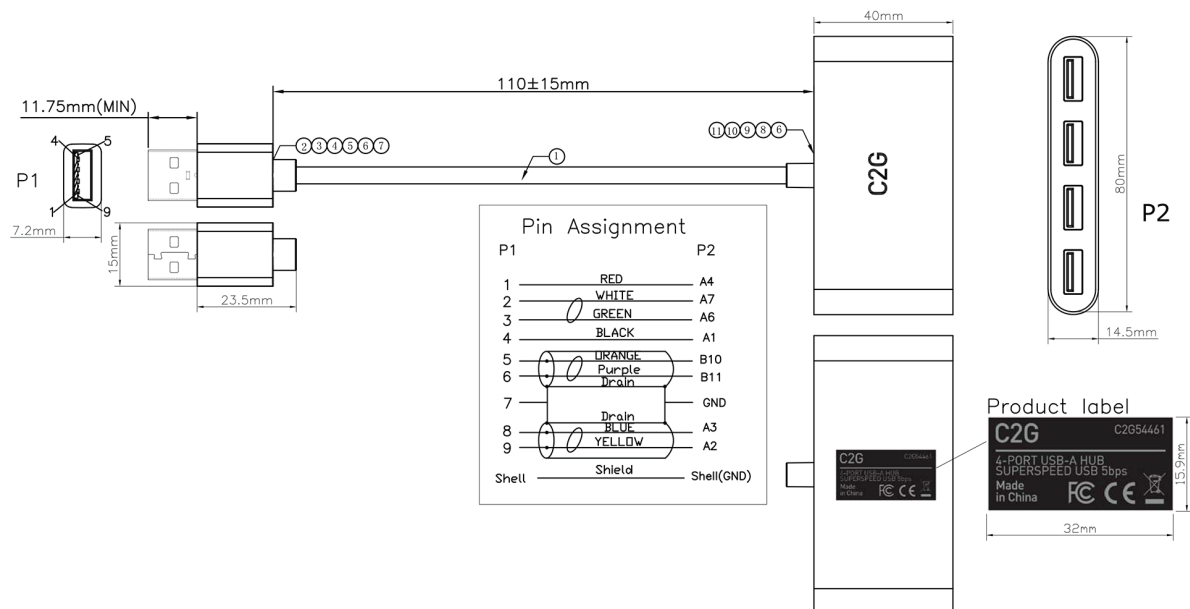

LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | c2g.com/uk | legrandav.com

EMEA P +31 495 580 840 E c2g.emea@av.legrand.com

©2021 Legrand AV Inc. 210288 Rev A 5/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.