


OZUL02B 8-Port 75W USB PD Charging Station with USB cables, USB-C x 2, USB-A x 6, PD 3.0

Product Images

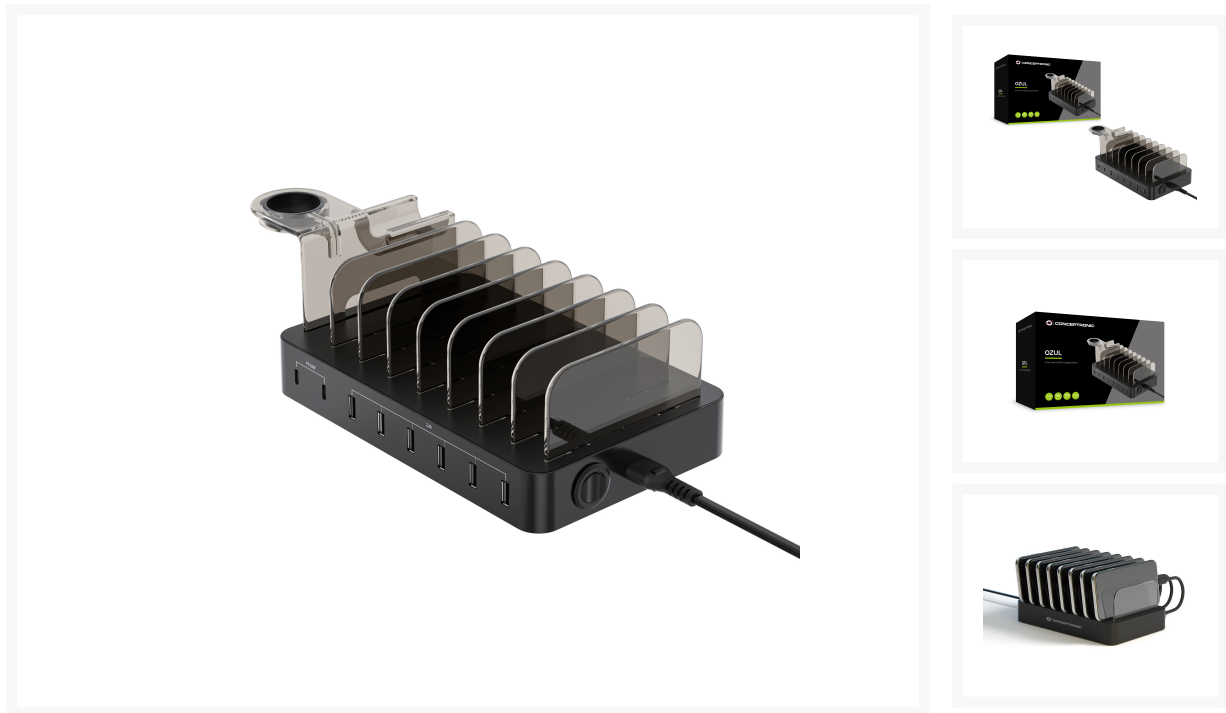

Short Description

- **Versatile Port Selection:** Equipped with 8 ports including 2 USB-C ports (with PD 3.0) and 6 USB-A ports, providing up to 75W and allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 5.0V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 technology for efficient and rapid charging, ensuring broad device compatibility.

Description

This charger features a versatile port selection with 8 ports, including 2 USB-C ports with Power Delivery (PD) 3.0 and 6 USB-A ports, providing up to 75W of power and allowing simultaneous charging for multiple devices with varying power requirements. It supports a range of output options from 5.0V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Incorporating USB Power Delivery (PD) 3.0 technology, this charger offers efficient and rapid charging, ensuring broad device compatibility.

Additional Information

Number of outputs	8
USB Type-A ports quantity	6
Fast charging technology	Power Delivery 3.0
USB Type-C ports quantity	2
Programmable power supply (PPS) (YES/NO)	No
Housing Material	Acrylonitrile butadiene styrene (ABS), Polycarbonate (PC)
Number of simultaneously connected devices (max)	8
Port 1 Power Output	USB-C1 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD 20.0W)
Port 2 Power Output	USB-C2 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD 20.0W)
Port 3 Power Output	USB-A1 output: DC 5.0V/2.4A
Port 4 Power Output	USB-A2 output: DC 5.0V/2.4A
Port 5 Power Output	USB-A3 output: DC 5.0V/2.4A
Port 6 Power Output	USB-A4 output: DC 5.0V/2.4A
Power Plug Type	EU
Number of cartons per pallet	54 piece
Package volume	2181.386 cubic_centimeter
Pallet net length	800 millimeter
Pallet net width	1200 millimeter
Pallet net height	1660 millimeter
Quantity per pack	1 piece
Package Depth	134 millimeter
Package Height	73 millimeter
Package Width	223 millimeter

Package Weight	40 gram
Harmonized System (HS) code	392690
Customs product code (TARIC)	8504408390
Quantity per pallet	540 piece
Sustainability compliance	No
Approval and Compliance	CE, RoHS
Package Content	Quick installation guide, USB cable (A-C), USB cable (C-C), USB cable (A-MicroB), Divider, Holder for Airpots and Applewatch, Lightning USB Cable
Package Contents	OZUL02B AC power cable 8 x divider 1 x 2-in-1 AirPods Apple Watch holder 1 x USB-A to Micro USB cable 1 x USB-A to Lightning cable 1 x USB-C to USB-C cable 1 x USB-A to USB-C cable Multilingual quick installation guide
USB Power Delivery revision	3.0
Operating temperature (T-T) Max	40 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	10%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	20%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Color	Black
EAN	4015867226612
Model Number	OZUL02B
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	1.5 ampere
Maximum power	75 watt

Icecat_Power protection features	Over current, Over power, Short circuit
Product Height	79 millimeter
Product Width	205 millimeter
Product Depth	130 millimeter
Product Weight	330 gram
Dimensions (W x D x H)	205 x 130 x 79 mm
Product weight (kg)	0.33

