

ProDockStation®

Universal Multi-Display Docking Station



Expand the Capabilities of Windows, Mac and Chrome Devices and Connect to up to 3 Displays

Features:

- ✓ USB-C and USB-A Compatible
- ✓ Supports up to 3 External Monitors
- ✓ 2 x DisplayPort
- ✓ 3 x HDMI
- ✓ 2 x USB-C
- ✓ 3 x USB-A
- ✓ Gigabit Ethernet
- ✓ 3.5mm Audio
- ✓ 100W Power
- ✓ Windows, Apple OS (including M1, M1X), and Chrome OS Compatible
- ✓ 0.5m USB-C to USB-A and USB-C to USB-C Cables Included
- ✓ Kensington® Security Slot
- ✓ Power Button

Simple, Effective Universal Connectivity

Enjoy universal compatibility with a wide range of operating systems, the ProDockStation® provides a simple and effective connectivity solution for charging, data transfer and video display from USB-C and USB-A devices.

Display, Charge, and Transfer with Ease


Equipped with HDMI, DisplayPort, Gigabit Ethernet, USB-A, USB-C and a combo audio port, the ProDockStation transforms Windows, Apple OS (including M1, M1X), and Chrome OS devices into fully functioning workstations.


Connect up to Three 4K Displays Simultaneously

Whether working with demanding applications, multitasking, or watching videos and films, the ProDockStation allows you to enjoy crisp 4K resolution across up to three additional monitors with Windows, Apple and Chrome devices.

Please note: to connect to third HDMI monitor, the connected device must support either DP alt mode or Thunderbolt.

Part Code: HYP-USBCAPD-S

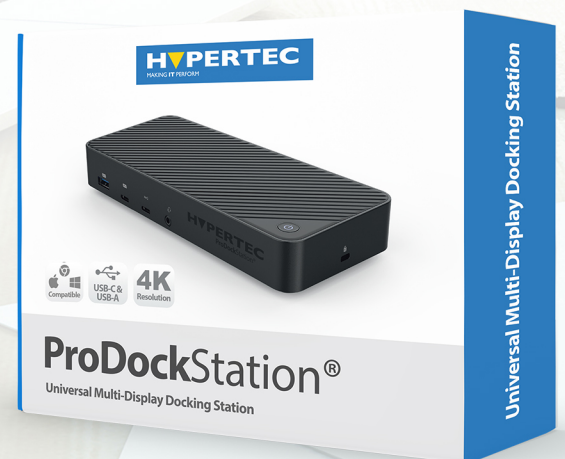

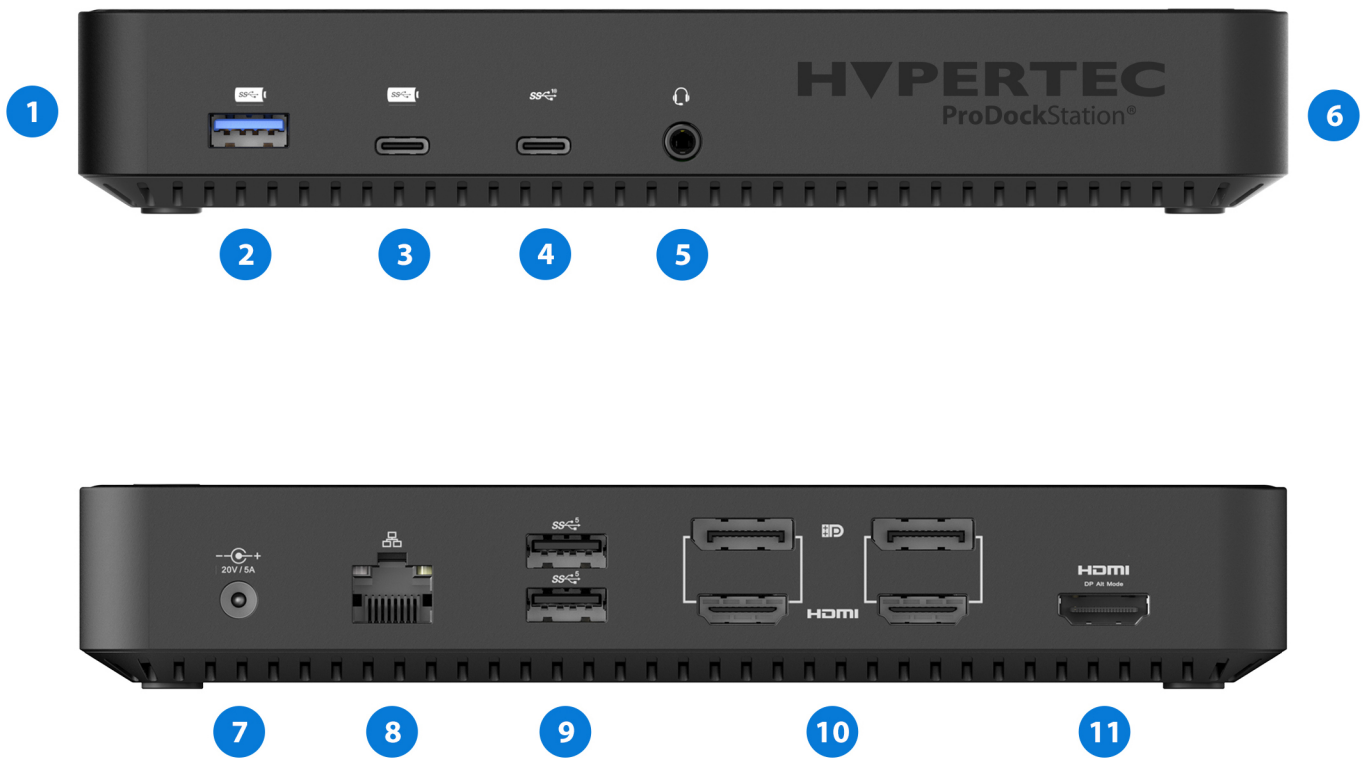

- | | |
|--|---|
| <ul style="list-style-type: none"> 1 USB-C Interface 2 USB-A 3.1 Gen2 (10Gbps data, BC1.2 charging) 3 USB-C 3.1 Gen2 (10Gbps data, BC1.2 charging) 4 USB-C 3.1 Gen1 (5Gbps data, charging) 5 Headset/ Mic 3.5mm 6 Kensington Security Slot | <ul style="list-style-type: none"> 7 DC 24V 8 Gigabit Ethernet 9 2 x USB-A 3.1 Gen1 (5Gbps data, charging) 10 2 x DisplayPort 1.2
2 x HDMI 2.0 11 HDMI (DP Alt Mode) |
|--|---|

Specification

Product Size: 191 (L) x 85 (W)x 31.8 (H) mm

Box Size: 280 (L) x 210 (W)x 42 (H) mm

Weight: 850g (including 130 DC power adapter, USB-C to C cable and USB-A to C cable).

Material: Plastic housing covered by soft silicon sheet.

Interface Specification

Support extended screens on both Mac OS (Intel and M1 chip) and Windows

HDMI 1 (DisplayLink) Single, Dual or Triple Display Resolution: 3840*2160@60Hz. Audio: Stereo. Audio Sample Rate: 16bit/48K

DisplayPort 1 (DisplayLink) Single, Dual or Triple Display Resolution: 3840*2160@60Hz. Audio: Stereo. Audio Sample Rate: 16bit/48K

HDMI 2 (DisplayLink) Single, Dual or Triple Display Resolution: 3840*2160@60Hz. Audio: Stereo. Audio Sample Rate: 16bit/48K

DisplayPort 2 (DisplayLink) Single, Dual or Triple Display Resolution: 3840*2160@60Hz. Audio: Stereo. Audio Sample Rate: 16bit/48K

HDMI 3 (DP ALT mode) Single, Dual or Triple Display Resolution: 3840*2160@30Hz. Audio: 7.1 channel. Audio Sample Rate: 24bit/192K.

DC Power: 130W. Input: 24V/5.42. Charge PC: 100W.

Operating Systems: Apple OS (including M1, M1X), Windows, Chrome OS

Certification: RoHS, REACH, Prop65, CE FCC